GP Batteries

Product Specification — *Model No.: GPPB10USB*

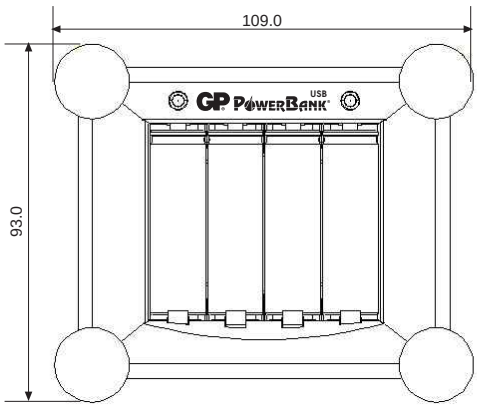

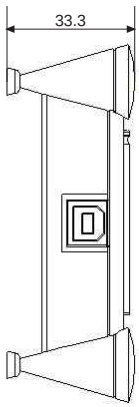

Unit : mm

Product Name	:	GP PowerBank USB
Description	:	NiMH AA Battery Charger
Input Voltage	:	5V DC
Output Voltage Range	:	2 x 2.8V DC
Application	:	For charging 2 or 4 pcs NiMH AA batteries with an operating computer and a 4-pin USB cable
Charging Current	:	300mA +/- 20%
Charging Time	:	

Type	Size	Capacity	Time (hours)
NiMH	AA	2200 series	~8.5
		2000 series	~7.5
		1800 mAh	~7
		1600 mAh	~6
		1300 mAh	~5

MTBF	:	30000 hours (at ambient temperature 25˚C)
Operating Temperature	:	0˚C to 45˚C
Storage Temperature	:	-25˚C to 60˚C
Charge Indicator	:	2 Green LEDs, 1 per channel
Dimensions	:	109 (L) X 93 (W) X 33.3 (T) mm
Approval	:	CE
Warranty Period	:	12 months from ex-factory date.

Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

03040I04070